





DEFLECTION HEAD DETAIL

OLD

NEW

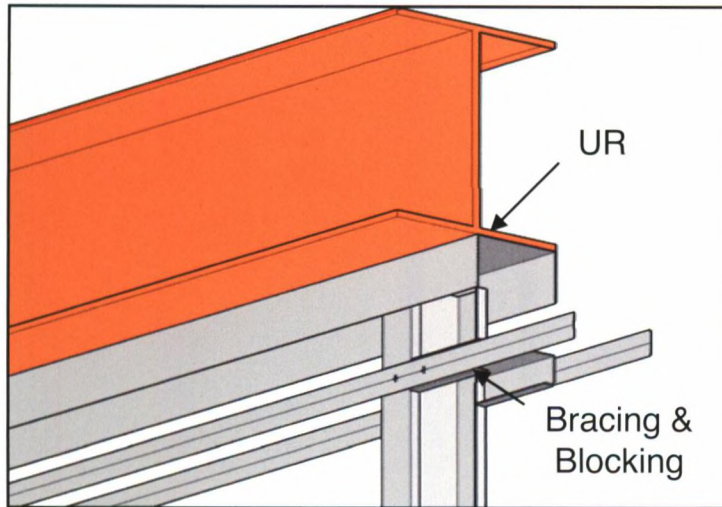


- Thicker, heavier UR head track
- Fixings to blocking and bracing in boarded faces
- Blocking and bracing

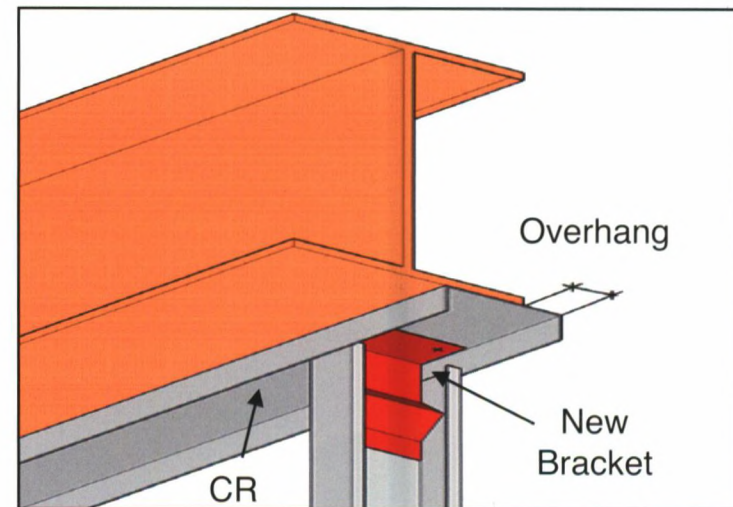

- Lighter, cheaper CR head track
- One simple bracket, two screws
- No fixings to boarded faces
- Overhang up to 1/3 stud depth
- In some cases even the CR can be omitted (no overhang)
- Less components, less site cutting


SAVE £5 per metre

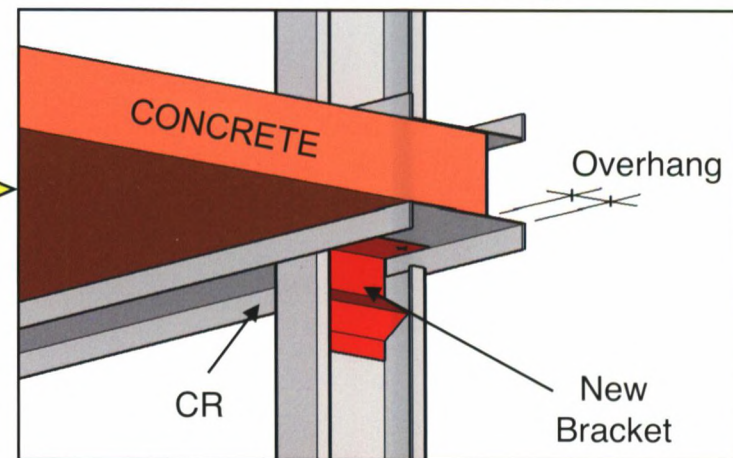



DEFLECTION HEAD DETAIL


BEFORE

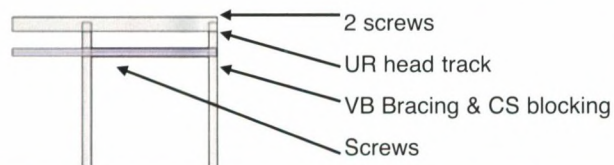

NEW

AFTER

1 bracket
2 screws




SAVE £5
per metre

New Bracket Applications


INTO STEEL ...

FULLY SUPPORTED

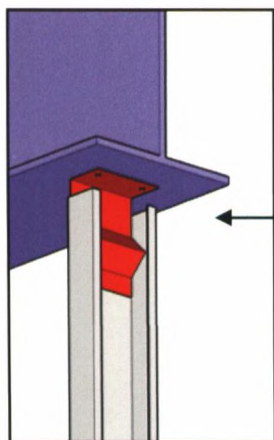

No CR
Head
Track


WITH OVERHANG

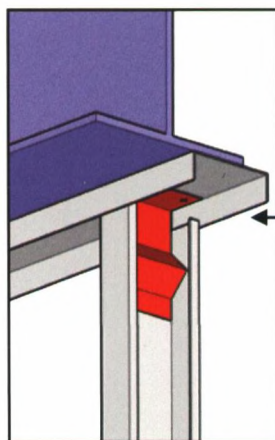

CR Head
Track


INTO CONCRETE ...

FULLY SUPPORTED *

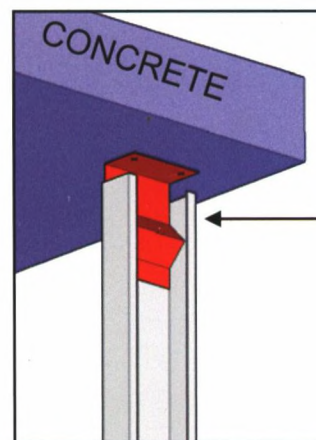

No CR
Head
Track

WITH OVERHANG

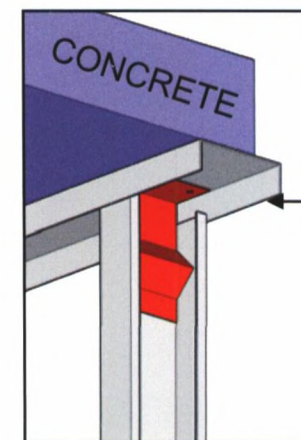

CR Head
Track

* CR Head Track required for
100,150 deep studs @ 1.2 gauge
and 1.5 gauge

KEY BENEFITS

- Less steel required - efficient design
- Lighter head track or no head track required
- One line of horizontal bracing removed
- Only 2 screws per bracket
- Less fixings to outside of frame - reduces return to site time
- Brackets designed for ease of installation

Ayrshire Metal Products, Royal Oak Way, Daventry, Northamptonshire NN11 8NR
Tel: 01327 300 990 Fax: 01327 300 885 Email: sales@ayrshire.co.uk